



KMF 095 01

NEW

Allied Motion



KinetiMax HPD Brushless DC Outer-Rotor Motors High Power Density, Frameless Stator-Rotor Sets

62 to 125 mm diameter, 0.16 to 6.30 Nm continuous torque, up to 1100 Watts output

Motion Solutions
that Change the Game



KinetiMax HPD Brushless DC Outer-Rotor Motors High Power Density, Frameless Stator-Rotor Sets

62 to 125 mm diameter, 0.16 to 6.30 Nm continuous torque, up to 1188 Watts output



The KinetiMax HPD range of outer-rotor brushless DC motors comes in frameless stator-rotor part sets. Available in six frame sizes and three stack-heights each, the HPD series enables you to select an optimum configuration with an exact performance fit for your application.

These compact kit motors offer an ideal solution especially where total motor length is crucial in space-constrained applications.

Their large stator ID (Inner Diameter) makes integration of larger ball-bearings possible, and the large clear aperture ID permits cabling to pass through the motor.

The HPD's excellent high torque-to-weight ratio is essential in applications where weight is critical. And with an efficiency ranging from 81% to 91% in a wide speed-torque range, the KinetiMax HPD frameless motors are ideal for battery-fed applications, where they help maximize the running time per battery charge.

Their low cogging torque combined with high peak torque improves motor behavior in servo applications.

Features & Benefits

- Winding selection for other Voltages
- Rated torque 0.16 to 6.30 Nm
- High torque-to-weight ratio
- Excellent efficiency from 81% up to 91% over a wide range around the nominal working point

Options & Accessories

- Hall commutation sensor board
- Temperature sensor mounted on stator

Typical Applications

- Automated Guided Vehicles (AGV)
- Robotics (arms, joints)
- Handheld hydraulic power tools
- Material handling systems
- Medical equipment
- Rotary actuators
- Gimbals



KMF 095 01



Specifications

Winding Identification ³		C	D	E	F	G	H	J	K
Nominal Supply Voltage DC Link	Volt	18	24	36	42	60	72	72	72
Rated Output Power ¹	Watt	301	323	350	327	336	302	229	169
Rated Speed	rpm	3129	3351	3638	3389	3491	3137	2381	1759
Rated Torque ¹	Nm	0.92							
Rated Line Current ^{1,4}	Arms	14.3	11.4	8.2	6.6	4.8	3.6	2.7	2.1
Max. Efficiency	%	88							
No Load Speed RPM (@ nominal voltage)	rpm	3266	3484	3771	3520	3629	3266	2514	1886
BEMF Constant Ke	V/krpm	5.5	6.9	9.5	11.9	16.5	22.0	28.6	38.2
Motor Speed Constant Kv (=1/Ke)	rpm/V	181.4	145.2	104.8	83.8	60.5	45.4	34.9	26.2
Continuous Stall Torque ¹	Nm	1.15							
Continuous Stall Line Current (rms) ¹	Arms	17.8	14.3	10.3	8.2	5.9	4.5	3.4	2.6
Peak Torque	Nm	3.00							
Max. Demagnetization Line Current	A	110	88	63	51	37	27	21	16
Torque/rms Line Current Kt ⁴	Nm/Arms	0.064	0.081	0.112	0.140	0.193	0.258	0.335	0.447
Resistance (terminal-to-terminal)	mOhm	43	66	126	193	390	652	1135	1922
Inductance (terminal-to-terminal)	μH	40	62	120	187	359	638	1077	1915
Back EMF (@3000 RPM terminal-to-terminal)	Vrms	3.9	4.9	6.8	8.4	11.7	15.6	20.3	27.0
Thermal Resistance (stator/rotor to ambient) ¹	°C/W	1.83							
Thermal Resistance Winding-Housing	°C/W	1.60							
Max. Winding Temperature	°C	160							
Number of Pole Pairs		15							
Weight	kg	0.45							
Rotor Inertia - Large I.D.	kgm ² * E-6	348							
Rotor Inertia - Small I.D.	kgm ² * E-6	366							
Mechanical Time Constant	ms	3.6							
Electrical Time Constant	ms	0.9							
Motor Constant Km	Nm/sqrt(W)	0.257							
Cogging Torque (typical, peak to peak)	Nm	0.023							
Drag Torque	Nm	0.017							
Viscous Damping	Nm/rpm	1.4E-05							
Thermal Time Constant of Winding only	s	28							
Adiabatic Heating of Winding at Peak Torque	K/s	5							
Rotor Inner Diameter [V] ²	mm	58							
Rotor Inner Diameter [W] ²	mm	20							
Rotor Outer Diameter [Z] ²	mm	95.2							
Stator Inner Diameter [Y] ²	mm	54.0							
Total Height [X] ²	mm	28.0							
Motor lead wire AWG size		12	12	14	14	20	20	20	20


(1) Assuming the stator-rotor set is mounted on a bracket with an aluminium flange diameter 1.5 times rotor diameter.

(2) See the dimensions in the drawing on the next page.

(3) Windings C, D, G and H are delta connected, windings E, F, J and K are wye connected.


(4) Line currents are the AC currents running into the three terminals of the stator.

T-n and T-I curves

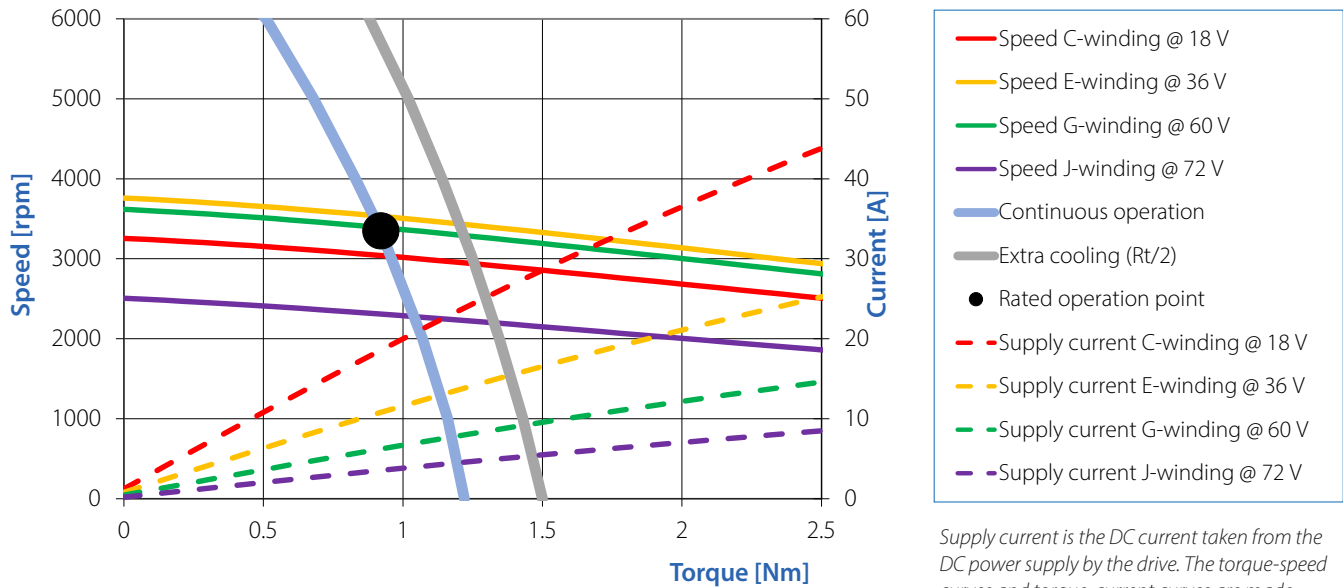


Supply current is the DC current taken from the DC power supply by the drive. The torque-speed curves and torque-current curves are made assuming a FOC drive is used.

T-Efficiency

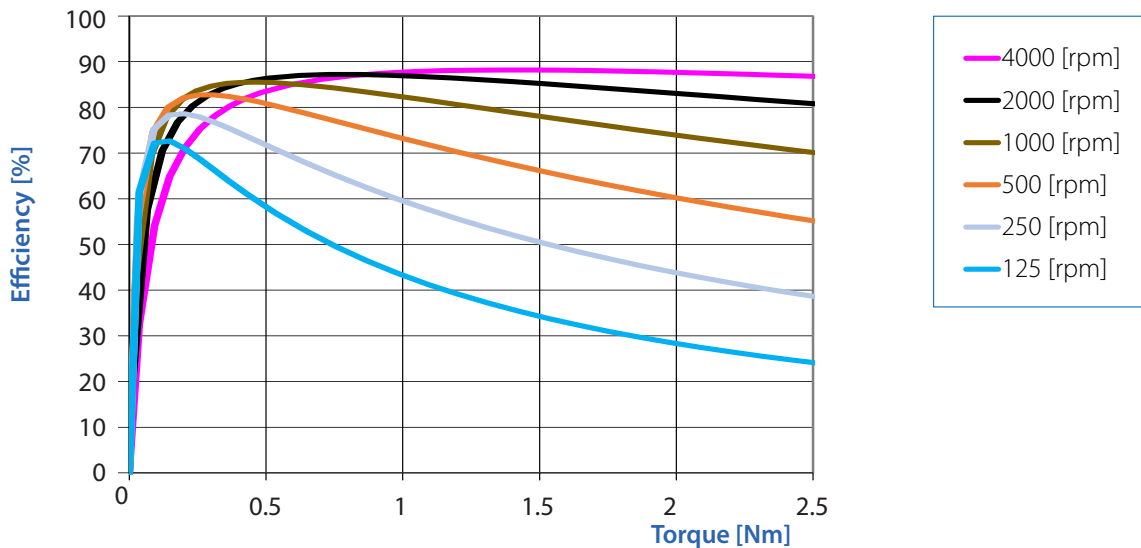


Outline Dimensions

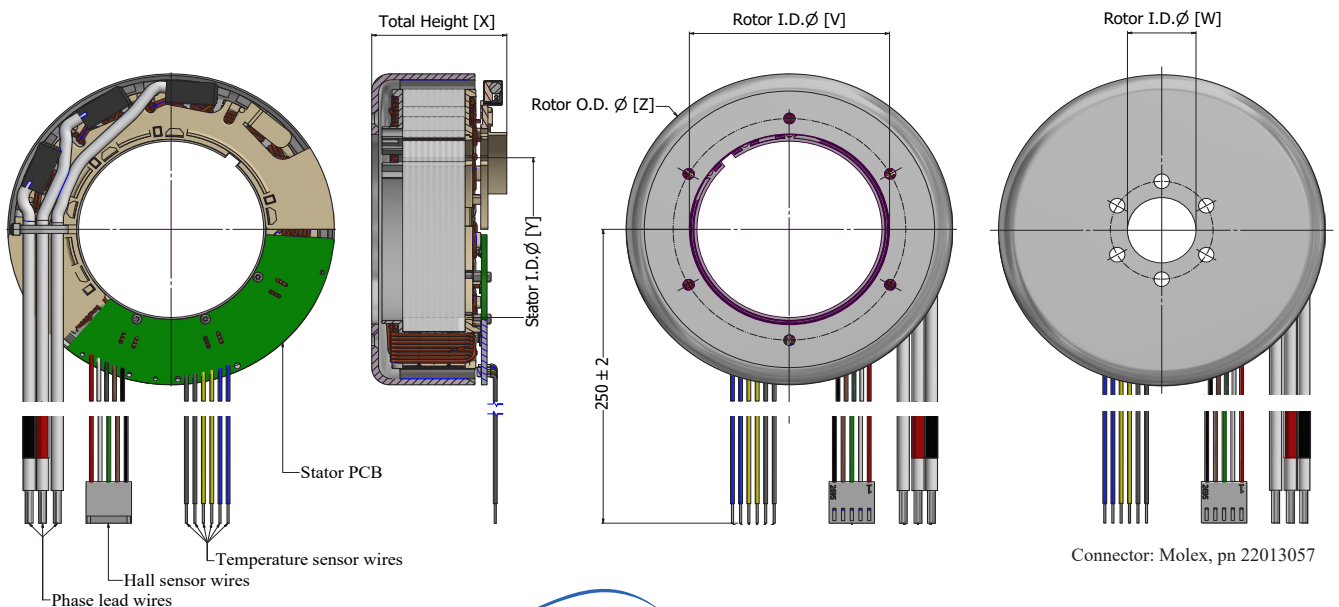

Sensors


Hall sensors

Hall sensor connections / specifications:

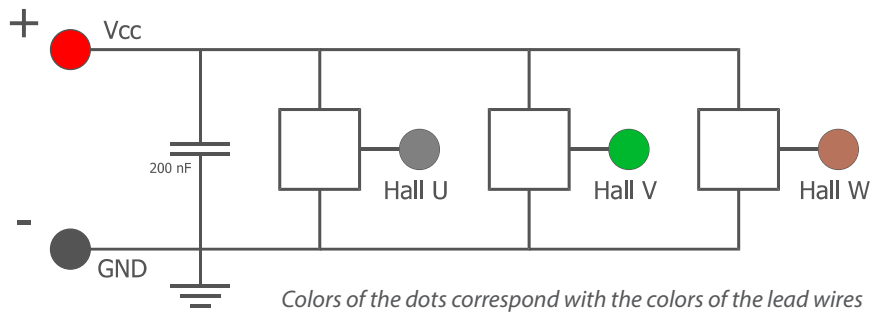

Specification Item	Value [Typ.]
Supply Voltage [VCC]	3.0 - 32 V
Supply Current	4.8 mA
Temperature Range	-40 °C + 170 °C
Output Type	Open drain
Max Output Voltage	32 V
Max Output Current	25 mA


Hall sensors switching sequence:

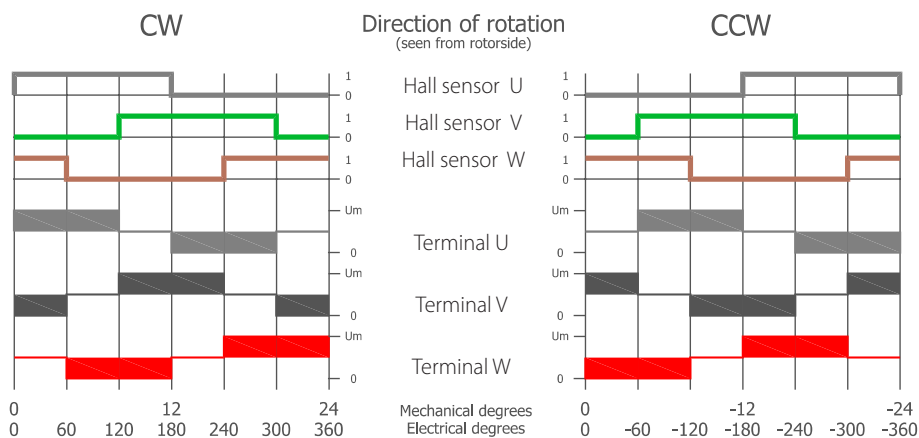

The colors of the 3 Hall sensor signals correspond with the 3 colors of the Hall lead wires.
The colors of the 3 signals of the terminals U, V, W, correspond with the 3 colors of the motor lead wires.

Temperature sensors

Temperature sensor connections / specifications:

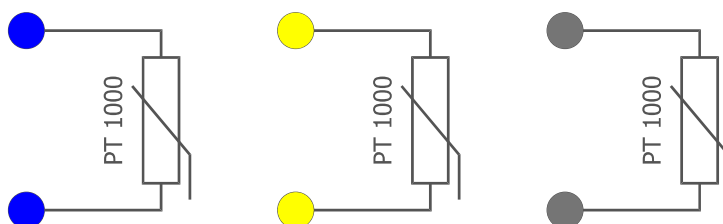


Specification Item	
Resistance at 0 °C	1000 Ohm
Temperature coefficient	+ 3850 ppm/K
Temperature Range	-40 °C to +175 °C
$\Delta T^{(1)}$	T.B.D.

Colors of the dots correspond with the colors of the lead wires, each wire color is used for a different motor phase.

(1) Due to the thermal coupling between the winding and sensor, the temperature measured by the sensor will be lower than the actual temperature of the winding.

Optional sensor types are possible after consulting the factory (PTC, NTC).

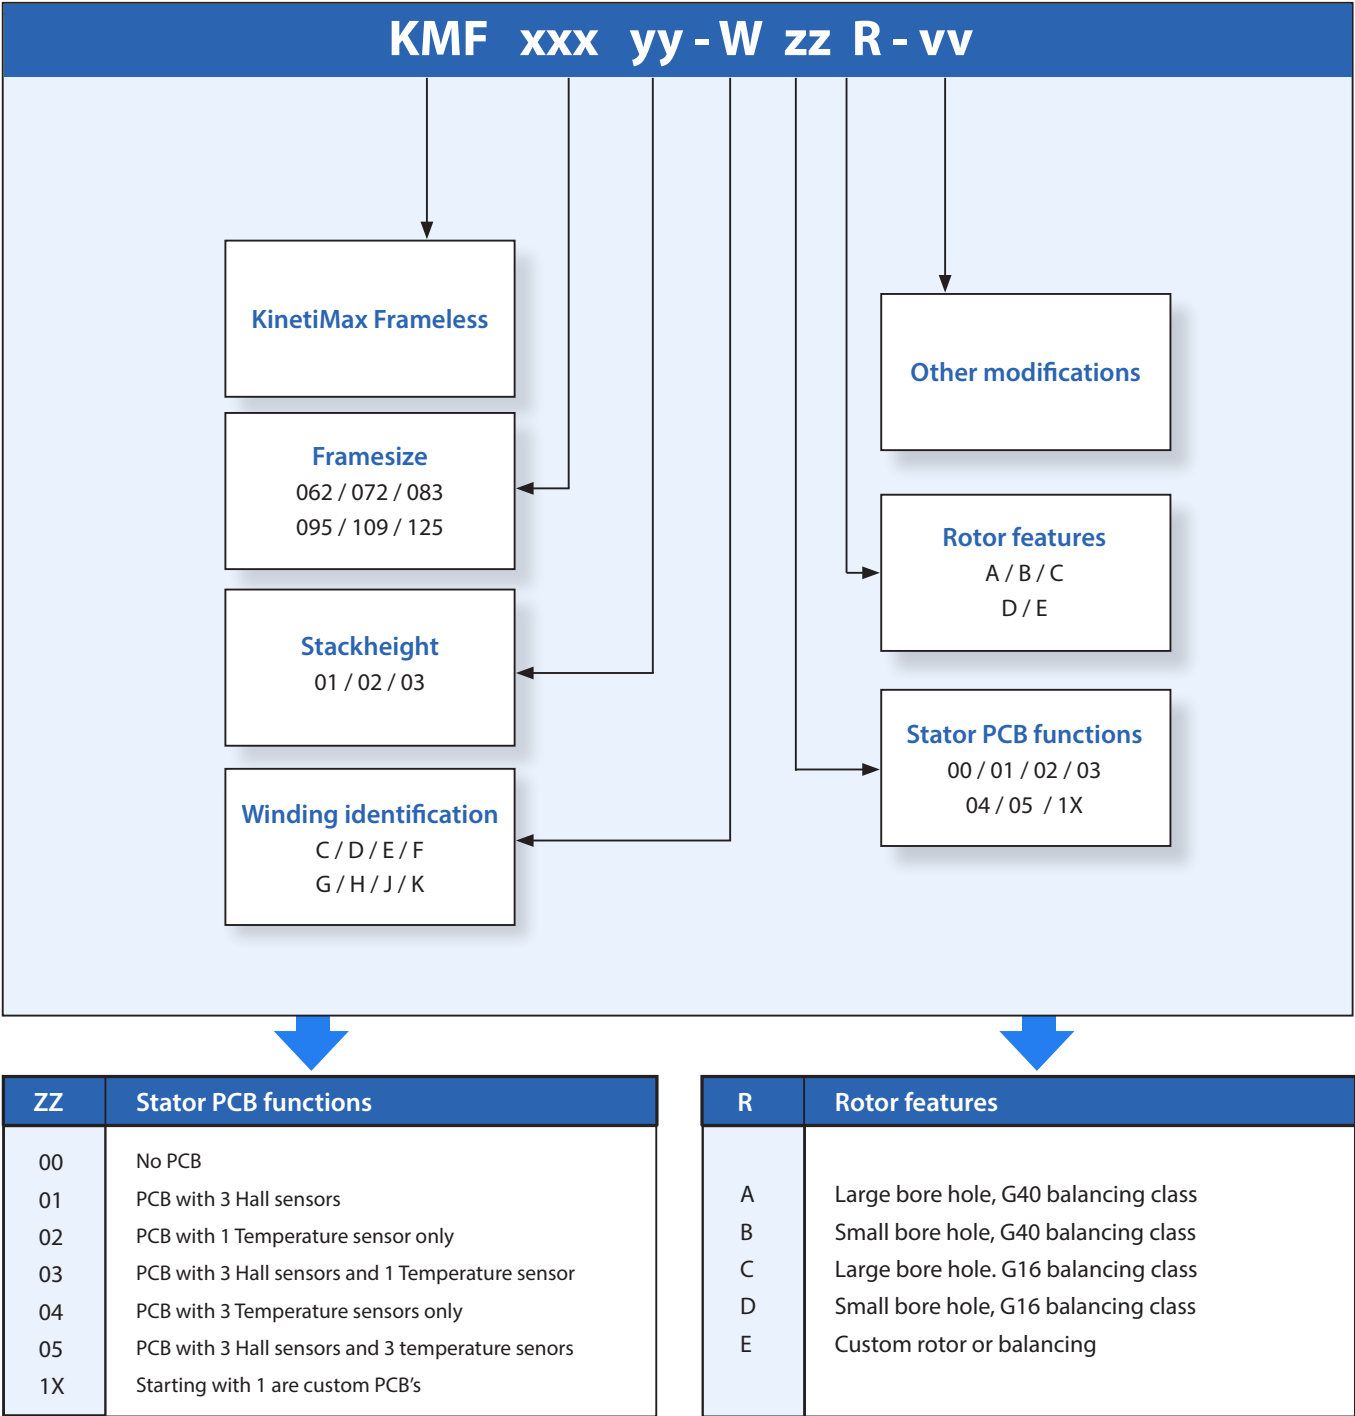

With **Other modifications** are meant custom added parts to stator or rotor like a stator bracket, other leadwires with connector or a rotor nave/shaft etc.

Allied Motion Solution Centers

Allied Motion Solution Centers provide support to customers around the world from five geographically-strategic locations. Each facility is staffed by experienced application engineers and customer service teams to assist you with all aspects of your motion control needs. We also have a global network of factory-trained Allied Motion Sales Partners to serve you. For contact information on the location nearest you, please see below or visit our website.

Global Presence and International Support



North America (US, Canada, Mexico)

Amherst, New York (HQ)

+1 (716) 242-7535
inquiry@alliedmotion.com

Europe

Kelheim, Germany

+49 9441/707 - 0
inquiry.eu@alliedmotion.com

Dordrecht, Netherlands

+31 (78) 621 9940
inquiry.nl@alliedmotion.com

Bromma, Sweden

+46 (8) 546 11 100
inquiry.eu@alliedmotion.com

Asia

Changzhou, Jiangsu, China

+86-(0)519-8511 3625
inquiry@alliedmotion.com